


Spiralite® 090

PVC All-Weather Suction Hose

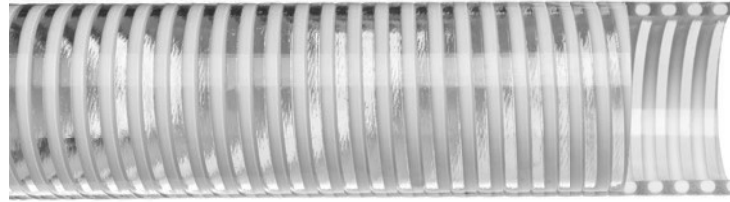

Appearance/Construction

Clear flexible PVC with white helix.
Smooth exterior and interior.

Benefits

Compounded to retain flexibility in low temperatures.
Clear wall allows easy inspection of liquid flow.

General Applications

General suction for water and light chemical solutions.

Temperature Range

-30° F to +130° F


Standard Lengths

3/4" thru 6" 100'
8" and above 20' 25' 30'

Nominal Size (inch)	Approx. O.D. (inch)	Rec. Max. W.P. @ 72° F (psi)	Approx. W.P. @ 140° F (psi)	Vac. Rating @ 72° F (in/HG)	Rec. Min. Bend Radius @ 72° F (inch)	Approx. B.P. @ 72° F (psi)	Approx. Weight (lbs./ft.)
3/4"	1.02	100	42	28	2	300	0.21
1"	1.29	100	42	28	3	300	0.29
1-1/4"	1.56	90	42	28	4	270	0.38
1-1/2"	1.84	90	42	28	4	270	0.49
2"	2.39	70	42	28	5	210	0.72
2-1/2"	2.92	65	32	28	7	195	0.99
3"	3.46	55	28	28	8	165	1.29
4"	4.56	50	28	28	12	150	2.05
5"	5.65	45	-	28	20	135	3.1
6"	6.80	45	-	28	23	135	4.45
8"	8.95	40	-	28	34	120	6.86
10"	11.30	40	-	28	40	120	12.05
12"	13.39	35	-	26	50	105	15.27

Spiralite® 110

PVC Green Standard Suction Hose

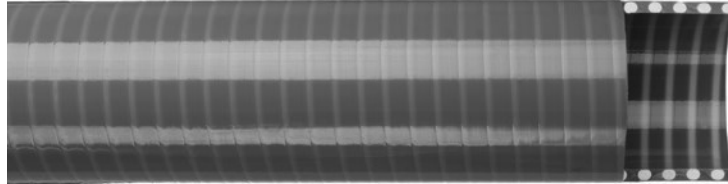

Appearance/Construction

Green flexible PVC with white helix.
Smooth exterior and interior.

Benefits

Highly versatile and durable.
Smooth interior for maximum flow.

General Applications

General suction for water and light chemical solutions.

Temperature Range

-10° F to +130° F

Standard Lengths

3/4" thru 6" 100'
8" and above 20' 25' 30'

Nominal Size (inch)	Approx. O.D. (inch)	Rec. Max. W.P. @ 72° F (psi)	Approx. W.P. @ 140° F (psi)	Vac. Rating @ 72° F (in/HG)	Rec. Min. Bend Radius @ 72° F (inch)	Approx. B.P. @ 72° F (psi)	Approx. Weight (lbs./ft.)
3/4"	1.01	100	42	28	2	300	0.20
1"	1.27	100	42	28	3	270	0.27
1-1/4"	1.53	90	42	28	4	270	0.36
1-1/2"	1.82	90	42	28	5	270	0.48
2"	2.36	70	42	28	6	210	0.66
2-1/2"	2.90	65	32	28	8	195	0.92
3"	3.44	55	28	28	9	165	1.20
4"	4.52	50	28	28	13	150	1.87
5"	5.65	45	-	28	21	135	3.00
6"	6.80	45	-	28	24	135	4.56
8"	8.95	40	-	28	35	120	7.05
10"	11.34	40	-	28	41	120	12.37
12"	13.39	35	-	26	53	105	15.66