


Spiralite® 115

PVC Clear Standard Suction Hose

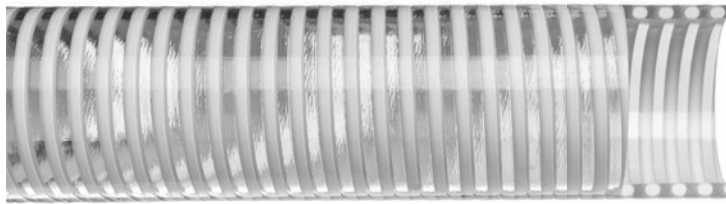

Appearance/Construction

Clear flexible PVC with white helix.
Smooth exterior and interior.

Benefits

Highly versatile and durable.
Clear wall allows easy inspection of liquid flow.

General Applications

General suction for water and light chemical solutions.

Temperature Range

-10° F to +130° F

Standard Lengths

3/4" thru 6" 100'
8" 20' 25' 30'

Nominal Size (inch)	Approx. O.D. (inch)	Rec. Max. W.P. @ 72° F (psi)	Approx. W.P. @ 140° F (psi)	Vac. Rating @ 72° F (in/HG)	Rec. Min. Bend Radius @ 72° F (inch)	Approx. B.P. @ 72° F (psi)	Approx. Weight (lbs./ft.)
3/4"	1.01	100	42	28	2	300	0.19
1"	1.27	100	42	28	3	270	0.25
1-1/4"	1.53	90	42	28	4	270	0.35
1-1/2"	1.82	90	42	28	5	270	0.43
2"	2.36	70	42	28	6	210	0.61
2-1/2"	2.90	65	32	28	8	195	0.86
3"	3.44	55	28	28	9	165	1.12
4"	4.52	50	28	28	13	150	1.75
5"	5.65	45	-	28	21	135	2.90
6"	6.80	45	-	28	24	135	4.37
8"	8.95	40	-	28	35	120	6.81
10"	11.34	40	-	28	41	120	11.90
12"	13.39	35	-	26	53	105	15.00

Spiralite® 120

PVC Green Corrugated Suction Hose



Appearance/Construction

Green flexible PVC with white helix.
Corrugated exterior, smooth interior.

Benefits

Corrugated for increased flexibility.
Smooth interior for maximum flow.

General Applications

General suction for water and light chemical solutions.

Temperature Range

-10° F to +130° F

Standard Lengths

1-1/2" thru 6" 100'
8" 20' 25' 30'

Nominal Size (inch)	Approx. O.D. (inch)	Rec. Max. W.P. @ 72° F (psi)	Vacuum Rating @ 72° F (in/HG)	Rec. Min. Bend Radius @ 72° F (inch)	Approx. B.P. @ 72° F (psi)	Approx. Weight (lbs./ft.)
1-1/2"	1.87	50	28	3	150	0.38
2"	2.41	40	28	4	120	0.58
2-1/2"	2.98	40	28	5	120	0.79
3"	3.54	35	28	6	105	1.07
4"	4.65	35	28	8	105	1.70
6"	6.98	35	28	15	105	4.26
8"	9.14	35	28	18	105	6.57
10"	11.30	30	21	28	90	9.37
12"	13.31	25	15	36	75	11.11