

Spiralite®

EPDM Suction Hose


Appearance/Construction
 Black EPDM tube with natural or green polyethylene helix.
 Corrugated exterior, smooth interior.

Benefits
 Solid EPDM tube for excellent durability.
 Good chemical resistance.


General Applications
 Liquid fertilizer transfer.
 Septic service.

Temperature Range
 -30° F to +140° F

Standard Lengths
 100'

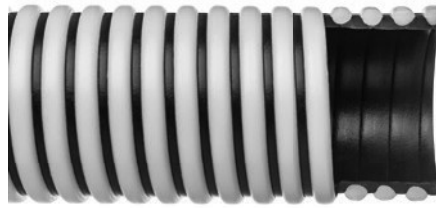

2000
 (White Helix)

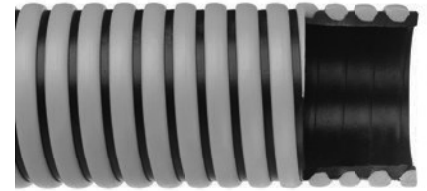

2000-06
 (Green Helix)

Nominal Size (inch)	Approx. O.D. (inch)	Rec. Max. W.P. @ 72° F (psi)	Vacuum Rating @ 72° F (in/HG)	Rec. Min. Bend Radius @ 72° F (inch)	Approx. B.P. @ 72° F (psi)	Approx. Weight (lbs./ft.)
1"	1.34	50	28	4	150	0.23
1-1/4"	1.61	50	28	5	150	0.30
1-1/2"	1.96	50	28	6	150	0.49
2"	2.49	50	28	9	150	0.69
2-1/2"	3.00	50	28	11	150	0.91
3"	3.60	50	28	12	150	1.21
4"	4.69	45	28	17	135	1.83
6"	6.86	35	20	27	105	3.84

Spiralite® 2400

EPDM Duct Hose


Appearance/Construction
 Black EPDM tube with natural polyethylene helix.
 Corrugated exterior, smooth interior.

Benefits
 Solid lightweight EPDM tube.
 Good chemical resistance.

General Applications
 Water and light chemical transfer.
 Air ducting.

Temperature Range
 -30° F to +140° F

Standard Lengths
 100'

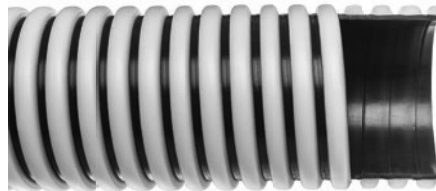

Nominal Size (inch)	Approx. O.D. (inch)	Rec. Max. W.P. @ 72° F (psi)	Rec. Min. Bend Radius @ 72° F (inch)	Approx. B.P. @ 72° F (psi)	Approx. Weight (lbs./ft.)
1-1/2"	1.83	33	3	100	0.30
2"	2.42	27	4	80	0.45
2-1/2"	3.00	25	5	75	0.65
3"	3.59	24	6	72	0.89
4"	4.68	22	7	66	1.27